

Smart, simple, secure.



IN120
Intelligent WiFi Access Control




The SARGENT IN120 WiFi lock brings you the next generation of WiFi access control in a sleek, minimalist design. Leverage your IT infrastructure to deliver advanced access control to more locations, with the flexibility and security of multiCLASS SE® technology from HID Global®.



FEATURES	BENEFITS
Utilizes IEEE 802.11 WiFi infrastructure	<ul style="list-style-type: none"> Significantly reduces installation costs Eliminates the need for any proprietary equipment Ideal for hard-to-wire locations
multiCLASS SE® Technology from HID Global®	<ul style="list-style-type: none"> Provides heightened security Supports: <ul style="list-style-type: none"> Multiple credential technologies, offering easy migration to higher security credentials or consolidation of mixed credentials HID Mobile Access® powered by Seos®, for both iOS® and Android™ devices
Field-upgradable 802.11b/g/n radio	<ul style="list-style-type: none"> Interoperability with other WiFi equipment Future proof for constantly evolving WiFi standards
Customizable feature set	<ul style="list-style-type: none"> Select only the features you need Add features as your requirements grow
Intelligence built into lock for local decision making	<ul style="list-style-type: none"> Lock operates regardless of network status Supports up to 2,400/10,000 users* Provides a 10,000 event transaction history/audit trail
Privacy button	<ul style="list-style-type: none"> Allows shelter in place / local lockdown Enables privacy capabilities for applications such as restrooms
Field selectable communication frequency	<ul style="list-style-type: none"> Allows you to balance security requirements with battery life
Integrated ANSI/BHMA Grade 1 hardware, available in cylindrical lock, mortise lock, and exit device configurations	<ul style="list-style-type: none"> Flexibility to support various openings Assurance of high quality hardware
Available with a wide range of finishes and decorative levers	<ul style="list-style-type: none"> Blends into any environment seamlessly Designed to meet the requirements of designers and architects

* Contact your access control system manufacturer for more information

Typical Configuration

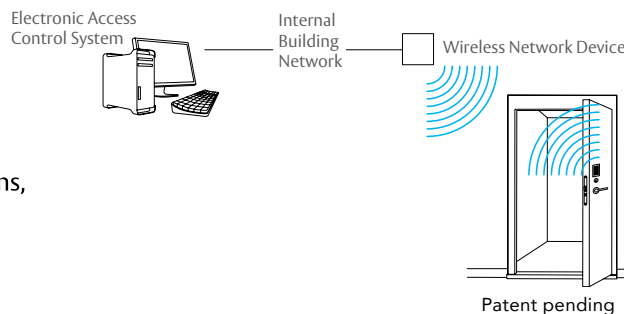

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

SARGENT Manufacturing Company
800-727-5477 • www.sargentlock.com

Copyright © 2014-2016, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

HID, iCLASS, iCLASS SE, and multiCLASS SE are registered trademarks or trademarks of HID Global in the U.S. and/or other countries. The Genuine HID Technology logo is a trademark owned and licensed by HID Global.

Credential Support:

- 2.4 GHz credentials:
 - Secure Identity Object™ (SIO) on Mobile IDs (Bluetooth Smart)
- 13.56 MHz credentials:
 - iCLASS®
 - iCLASS SE® (SIO-enabled)
 - iCLASS® Seos®
 - SIO on MIFARE® Classic
 - SIO on MIFARE DESfire® EV1
 - MIFARE Classic
 - DESfire EV1
 - NFC-enabled mobile phones
- 125 kHz credentials:
 - HID Prox®

Operating Power:

- 6 AA batteries or
- 12-24VDC hard power option

Security:

- AES 128-bit encryption
- Supports current WiFi network security standards, including:
 - WEP, WPA and WPA2
 - 802.1x (e.g. EAP, PEAP, PAP)

Software:

- Works with ASSA ABLOY IP-Enabled Access Control Partner software, allowing simple integration into existing or new systems
- SDK and support available to integrate into other third party access control systems (contact: OEMSupport_Group@assaabloy.com)

EAC Regulatory Compliance:

- UL294 6th Edition
- CAN/ULC S319
- BHMA A156.25

